

Fume A-Vent Conventional Overhead (Simple Drop) Systems


Date 7/12

Part No.SD-XXX

Simple Drop Systems

TAB 2-A

Fume-A-Vent's Overhead Systems are the user-friendly and cost-effective solution that meets a wide variety of demands. These systems incorporate many hose types and lifting configurations. The hose types range from high-temperature silicone to medium-temperatures polyester. The lifting configurations include ropes and pulleys and cable balancers. Complete the package by adding a direct-mount fan, which allows a complete stand-alone system, or connect to ductwork and a central fan.

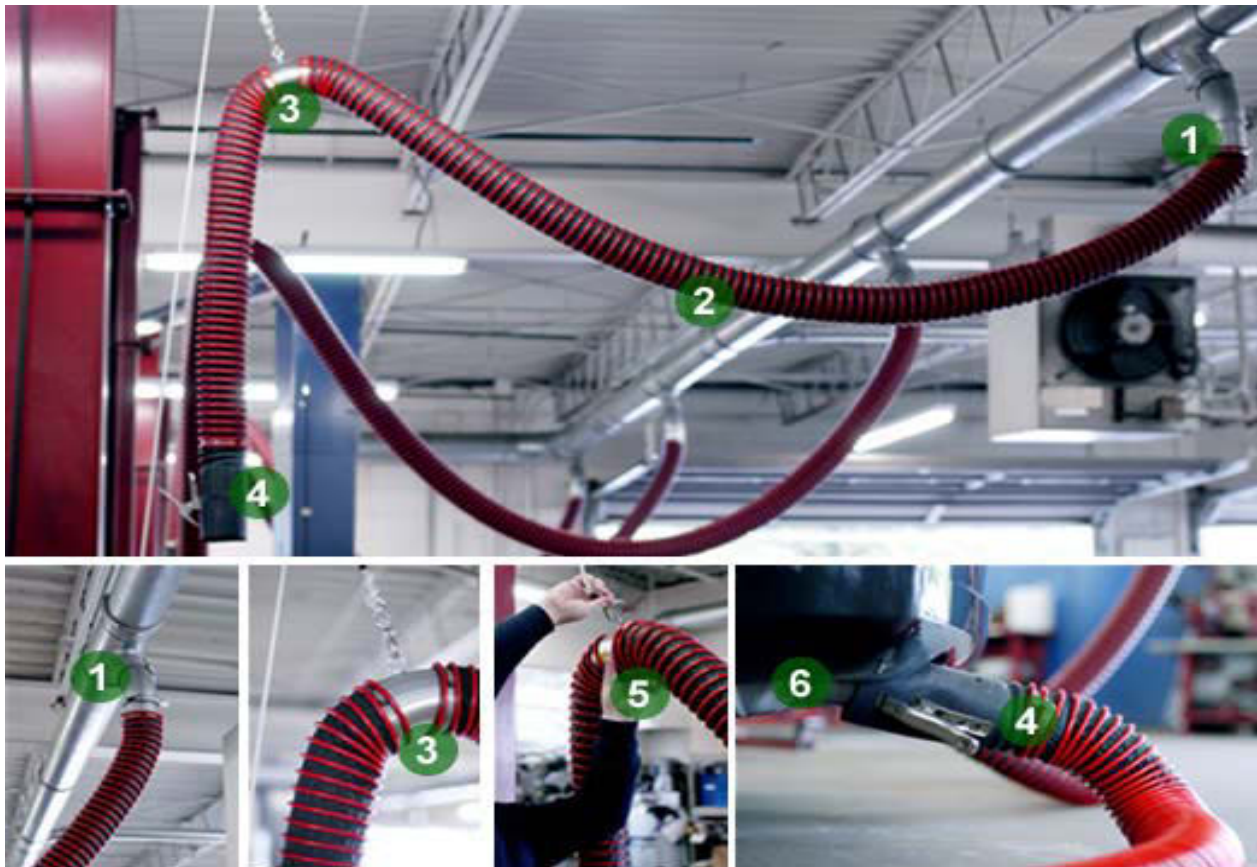

Simple Drop Explained

1. Connects directly to the ducting system.
2. Hose is designed with the exact temperature and length needed for your custom application.
3. Hose is stowed using an elbow joint which suspends the hose.
4. A nozzle is selected which meets the needs of your custom application.
5. The hose is lowered from the ceiling and easily unclipped for use.
6. The nozzle easily attaches to the exhaust source.


Fume-A-Vent Simple Drop System with Rope & Pulley Lifting System

Date 7/12

Part No. SDP-X-XXXX-C

Rope & Pulley Simple Drop System

TAB 2-B

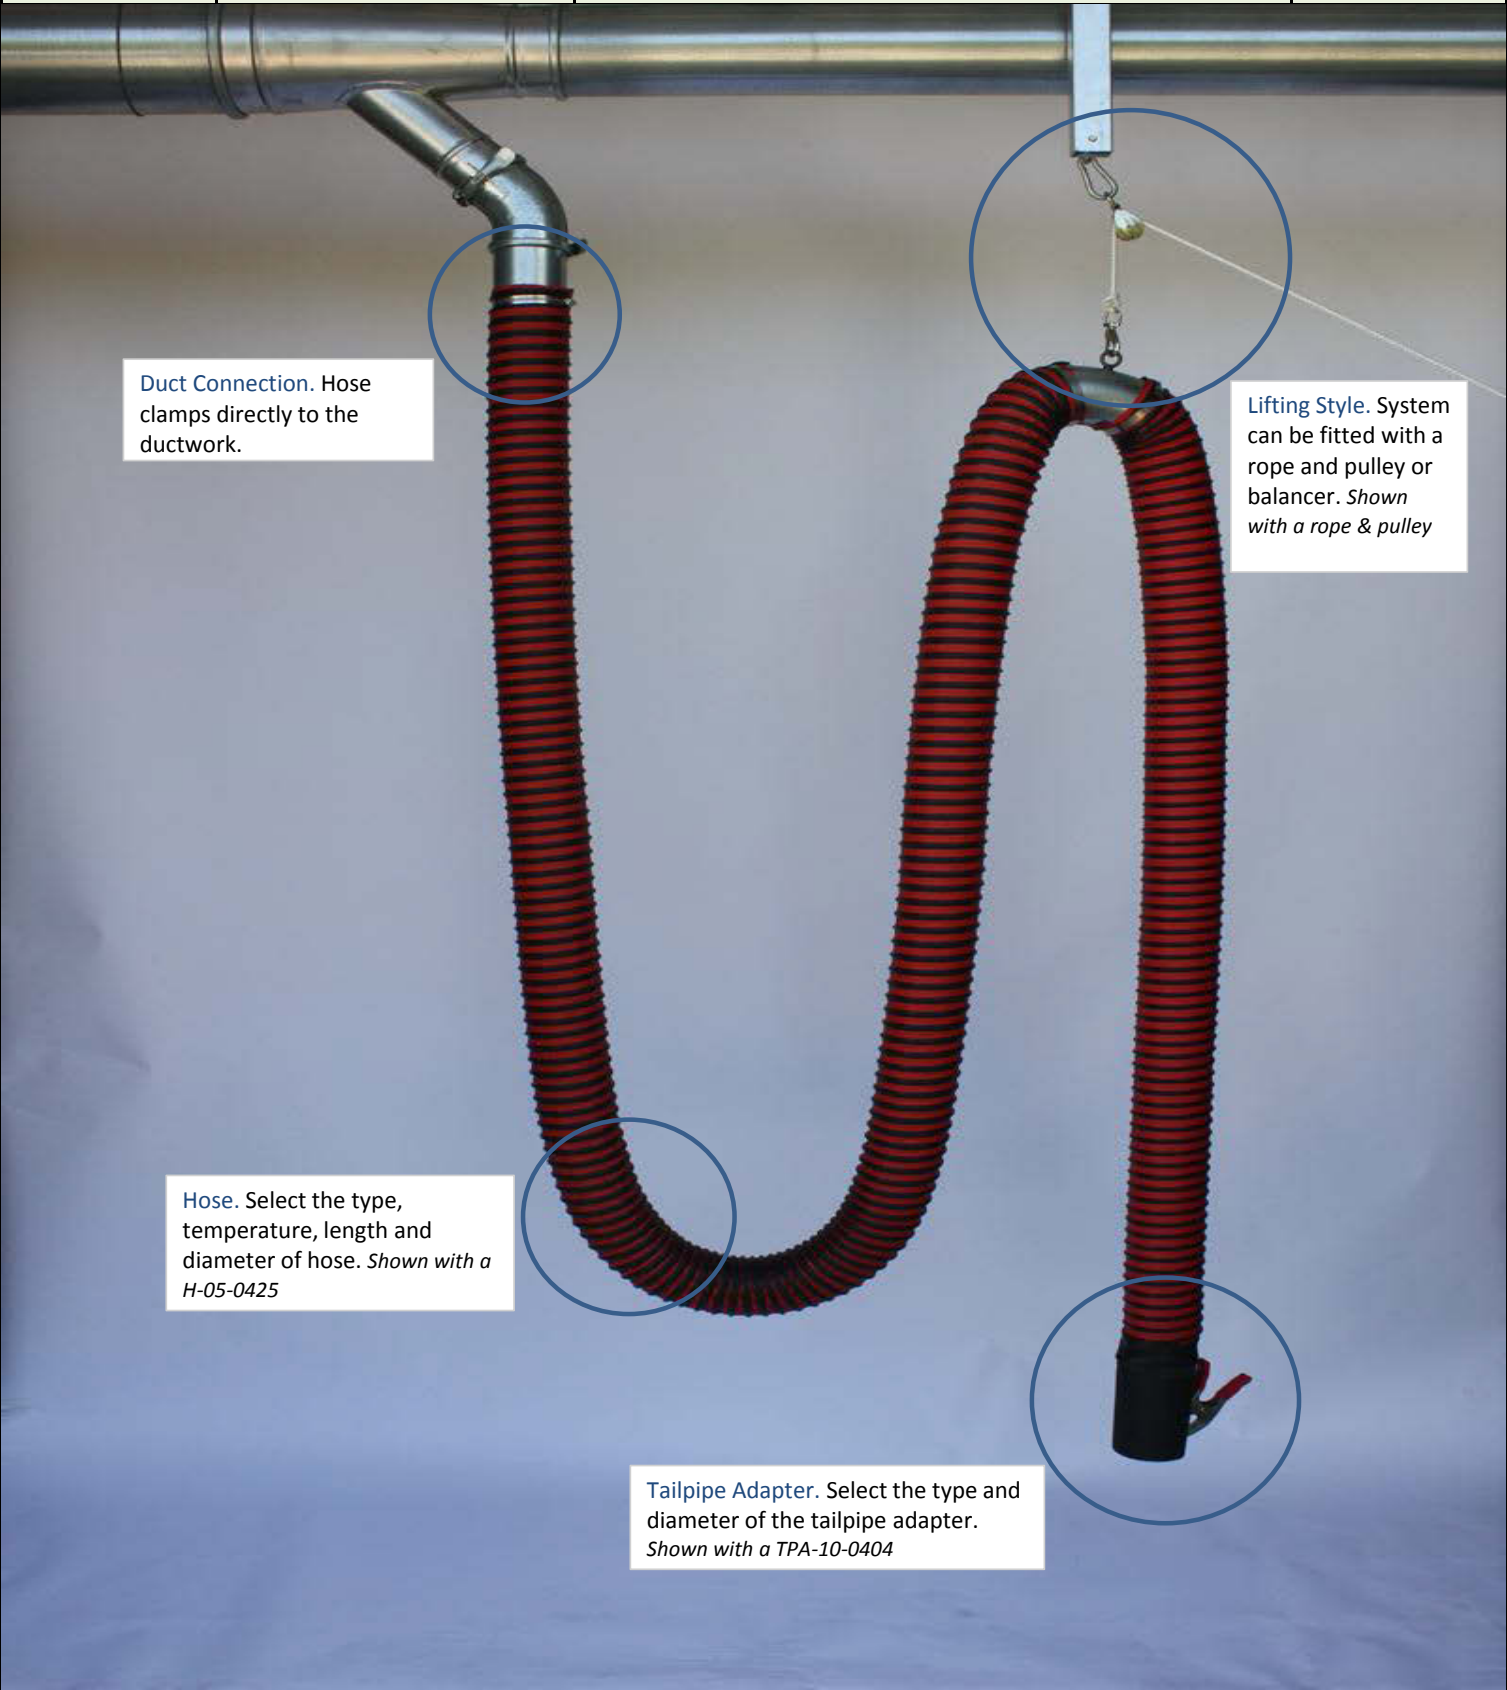

Duct Connection. Hose clamps directly to the ductwork.

Lifting Style. System can be fitted with a rope and pulley or balancer. *Shown with a rope & pulley*

Hose. Select the type, temperature, length and diameter of hose. *Shown with a H-05-0425*

Tailpipe Adapter. Select the type and diameter of the tailpipe adapter. *Shown with a TPA-10-0404*

FUME-A-VENT™
EXHAUST REMOVAL SYSTEMS
A Product of Air Cleaning Specialists, Inc.

AIR CLEANING SPECIALISTS, INC.
11088 Gravois Industrial Ct. St. Louis MO 63128
866 455-2132 Fax 636 349-0556
www.fumeavent.com info@fumeavent.com

This drawing has been copyrighted
and is the property of
Air Cleaning Specialists, Inc.

Fume-A-Vent Type 4A Neoprene Coated Polyester 400°F Hose

Date 7/12

Part No. H-04A-XXXX

Type 04A General Purpose 400°F Hose

TAB 1-D-2

The Fume-A-Vent Type 4A Black Neoprene Hose is ideal for general purpose use and is a very economical with high efficiency air flow. It is ideal for use with cold or hot air transportation, engine or vehicle construction, exhaust and extraction applications as well. The hose has exceeded 300°F during certified testing and is rated to 400°F for intermittent use.

Temperature Range: - 30°F to +300°F (Baking Test)

This product meets UL 94, V-O requirements for flame resistance.

The temperature rating is 400°F for intermittent use when a Fan is utilized.

This hose features Neoprene-Coated Polyester Fabric with galvanized steel helix. It is highly flexible and has a high compressibility ratio. It is vibration proof and flame resistant.

Other information including wall thickness and helix pitch are available upon request. In some cases, a Fan and a Tailpipe Adaptor will be required. Common lengths shown below include 15' to 30' with 4" to 8" Diameters. Other size options are always available.



Part No	Description	Wt. Lbs.
H-04A-0415	Fume-A-Vent 4" x 15' Type 4A 400° Neoprene Coated Polyester	6
H-04A-0420	Fume-A-Vent 4" x 20' Type 4A 400° Neoprene Coated Polyester	8
H-04A-0425	Fume-A-Vent 4" x 25' Type 4A 400° Neoprene Coated Polyester	10.1
H-04A-0430	Fume-A-Vent 4" x 30' Type 4A 400° Neoprene Coated Polyester	12.1
H-04A-0515	Fume-A-Vent 5" x 15' Type 4A 400° Neoprene Coated Polyester	8.1
H-04A-0520	Fume-A-Vent 5" x 20' Type 4A 400° Neoprene Coated Polyester	10.8
H-04A-0525	Fume-A-Vent 5" x 25' Type 4A 400° Neoprene Coated Polyester	13.5
H-04A-0530	Fume-A-Vent 5" x 30' Type 4A 400° Neoprene Coated Polyester	16.2
H-04A-0615	Fume-A-Vent 6" x 15' Type 4A 400° Neoprene Coated Polyester	9.1
H-04A-0620	Fume-A-Vent 6" x 20' Type 4A 400° Neoprene Coated Polyester	12.1
H-04A-0625	Fume-A-Vent 6" x 25' Type 4A 400° Neoprene Coated Polyester	15.1
H-04A-0630	Fume-A-Vent 6" x 30' Type 4A 400° Neoprene Coated Polyester	18.1
H-04A-0815	Fume-A-Vent 8" x 15' Type 4A 400° Neoprene Coated Polyester	12.1
H-04A-0820	Fume-A-Vent 8" x 20' Type 4A 400° Neoprene Coated Polyester	16.1
H-04A-0825	Fume-A-Vent 8" x 25' Type 4A 400° Neoprene Coated Polyester	20.1
H-04A-0830	Fume-A-Vent 8" x 30' Type 4A 400° Neoprene Coated Polyester	24.2