
Fume A-Vent Conventional Overhead (Simple Drop) Systems

Date 7/12 Part No.SD-XXX Simple Drop Systems TAB 2-A

Fume-A-Vent's Overhead Systems are the user-friendly and cost-effective solution that meets a wide variety of demands. These systems incorporate many hose types and lifting configurations. The hose types range from high-temperature silicone to medium-temperatures polyester. The lifting configurations include ropes and pulleys and cable balancers. Complete the package by adding a direct-mount fan, which allows a complete stand-alone system, or connect to ductwork and a central fan.

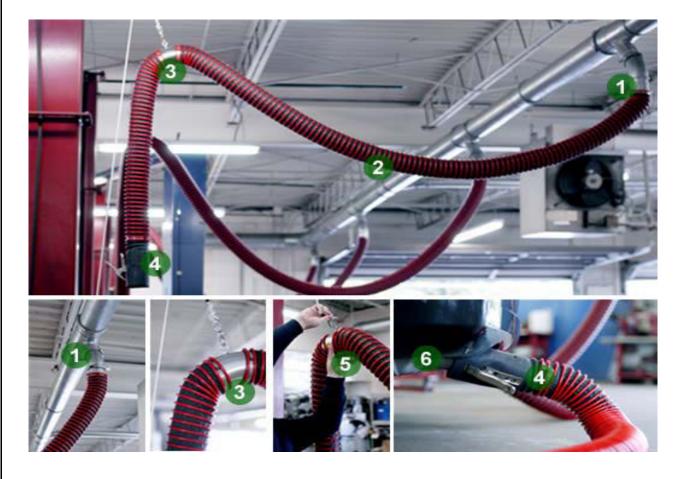


Simple Drop Explained

- 1. Connects directly to the ducting system.
- 2. Hose is designed with the exact temperature and length needed for your custom application.
- 3. Hose is stowed using an elbow joint which suspends the hose.
- 4. A nozzle is selected which meets the needs of your custom application.
- 5. The hose is lowered from the ceiling and easily unclipped for use.
- 6. The nozzle easily attaches to the exhaust source.



Fume-A-Vent Simple Drop System with Rope & Pulley Lifting System

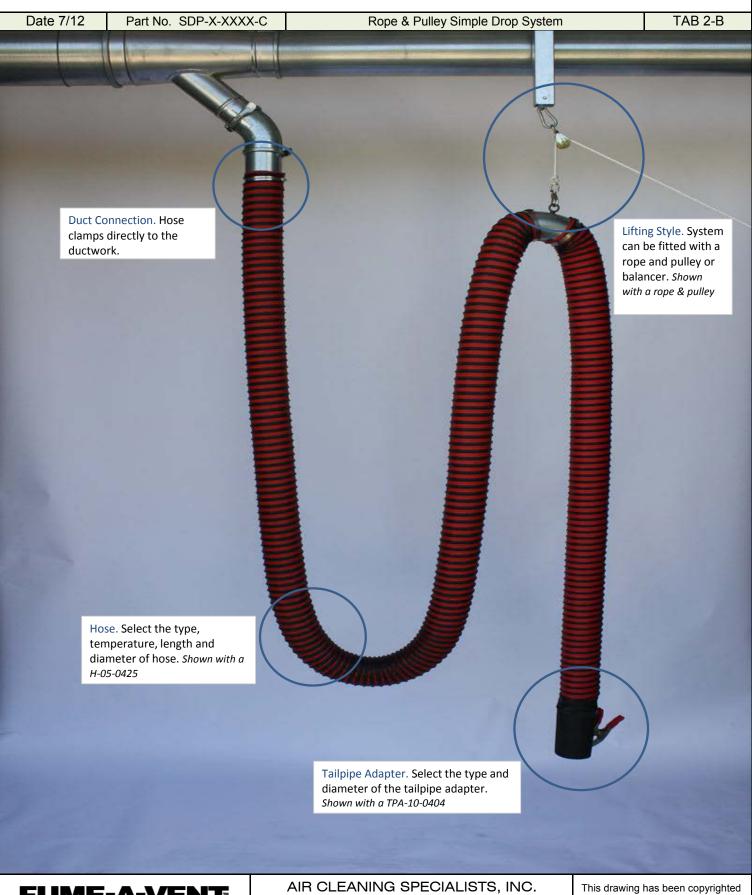



11088 Gravois Industrial Ct. St. Louis MO 63128 866 455-2132 Fax 636 349-0556

www.fumeavent.com info@fumeavent.com

and is the property of Air Cleaning Specialists, Inc.

Fume-A-Vent Type 5 400°F Neoprene-Coated Polyester Fabric Hose

Date 7/12 Part No. H-05-XXXX Type 5 400°F Hose TAB 1-E

Fume-A-Vent Type 5 Hose is specially designed with Exhaust Removal in mind. It can be used on hose reels, Simple Drop Systems, and medium to light duty car exhaust removal. Its coated materials have some of the best outside wear resistance.

Temperature Range: -5°F to +400°F

This product passed UL-94,V-O standards for flame resistance.

This product has an overall oven baking temperature of 350°F. When used with a exhaust Fan, higher temperatures can be seen.

This hose is made with a Flame Resistant Neoprene-Coated Polyester Fabric with a red rubber coated galvanized steel helix that is extremely resistant to wear. The exterior helix deign makes great flow characteristics as well. The hose is made of a black Neoprene-coated polyester fabric.

Other information including wall thickness and helix pitch are available upon request. Common lengths shown below



Part No	Description	Wt. Lbs.
H-05-0320	3" x 20' Type 5 400° Neoprene-Coated Polyester Fabric with Plastic Abrasion Protector	8.05
H-05-0415	4" x 15' Type 5 400° Neoprene-Coated Polyester Fabric with Plastic Abrasion Protector	7.95
H-05-0420	4" x 20' Type 5 400° Neoprene-Coated Polyester Fabric with Plastic Abrasion Protector	10.60
H-05-0425	4" x 25' Type 5 400° Neoprene-Coated Polyester Fabric with Plastic Abrasion Protector	13.25
H-05-0430	4" x 30' Type 5 400° Neoprene-Coated Polyester Fabric with Plastic Abrasion Protector	15.90
H-05-0435	4" x 35' Type 5 400° Neoprene-Coated Polyester Fabric with Plastic Abrasion Protector	18.55
H-05-0520	5" x 20' Type 5 400° Neoprene-Coated Polyester Fabric with Plastic Abrasion Protector	12.75
H-05-0530	5" x 30' Type 5 400° Neoprene-Coated Polyester Fabric with Plastic Abrasion Protector	19.13
H-05-0615	6" x 15' Type 5 400° Neoprene-Coated Polyester Fabric with Plastic Abrasion Protector	14.80
H-05-0620	6" x 20' Type 5 400° Neoprene-Coated Polyester Fabric with Plastic Abrasion Protector	19.73
H-05-0630	6" x 30' Type 5 400° Neoprene-Coated Polyester Fabric with Plastic Abrasion Protector	29.59
H-05-0815	8" x 15' Type 5 400° Neoprene-Coated Polyester Fabric with Plastic Abrasion Protector	17.72
H-05-0820	8" x 20' Type 5 400° Neoprene-Coated Polyester Fabric with Plastic Abrasion Protector	23.62
H-05-0825	8" x 25' Type 5 400° Neoprene-Coated Polyester Fabric with Plastic Abrasion Protector	29.53
H-05-0830	8" x 30' Type 5 400° Neoprene-Coated Polyester Fabric with Plastic Abrasion Protector	35.43



AIR CLEANING SPECIALISTS, INC.