


# Fume-A-Vent Simple Drop System with Rope & Pulley Lifting System

Date 7/12

Part No. SDP-X-XXXX-C

Rope & Pulley Simple Drop System

TAB 2-B



**Duct Connection.** Hose clamps directly to the ductwork.

**Lifting Style.** System can be fitted with a rope and pulley or balancer. *Shown with a rope & pulley*

**Hose.** Select the type, temperature, length and diameter of hose. *Shown with a H-05-0425*

**Tailpipe Adapter.** Select the type and diameter of the tailpipe adapter. *Shown with a TPA-10-0404*

**FUME-A-VENT**  
**EXHAUST REMOVAL SYSTEMS**  
A Product of Air Cleaning Specialists, Inc.

**AIR CLEANING SPECIALISTS, INC.**

826 Horan Drive Fenton, MO 63026

866 455-2132 Fax 636 349-0556

[www.fumeavent.com](http://www.fumeavent.com)

[info@fumeavent.com](mailto:info@fumeavent.com)

This drawing has been copyrighted and is the property of Air Cleaning Specialists, Inc.

## Fume A-Vent Conventional Overhead (Simple Drop) Systems


Date 7/12

Part No.SD-XXX

Simple Drop Systems

TAB 2-A

**Fume-A-Vent's** Overhead Systems are the user-friendly and cost-effective solution that meets a wide variety of demands. These systems incorporate many hose types and lifting configurations. The hose types range from high-temperature silicone to medium-temperatures polyester. The lifting configurations include ropes and pulleys and cable balancers. Complete the package by adding a direct-mount fan, which allows a complete stand-alone system, or connect to ductwork and a central fan.

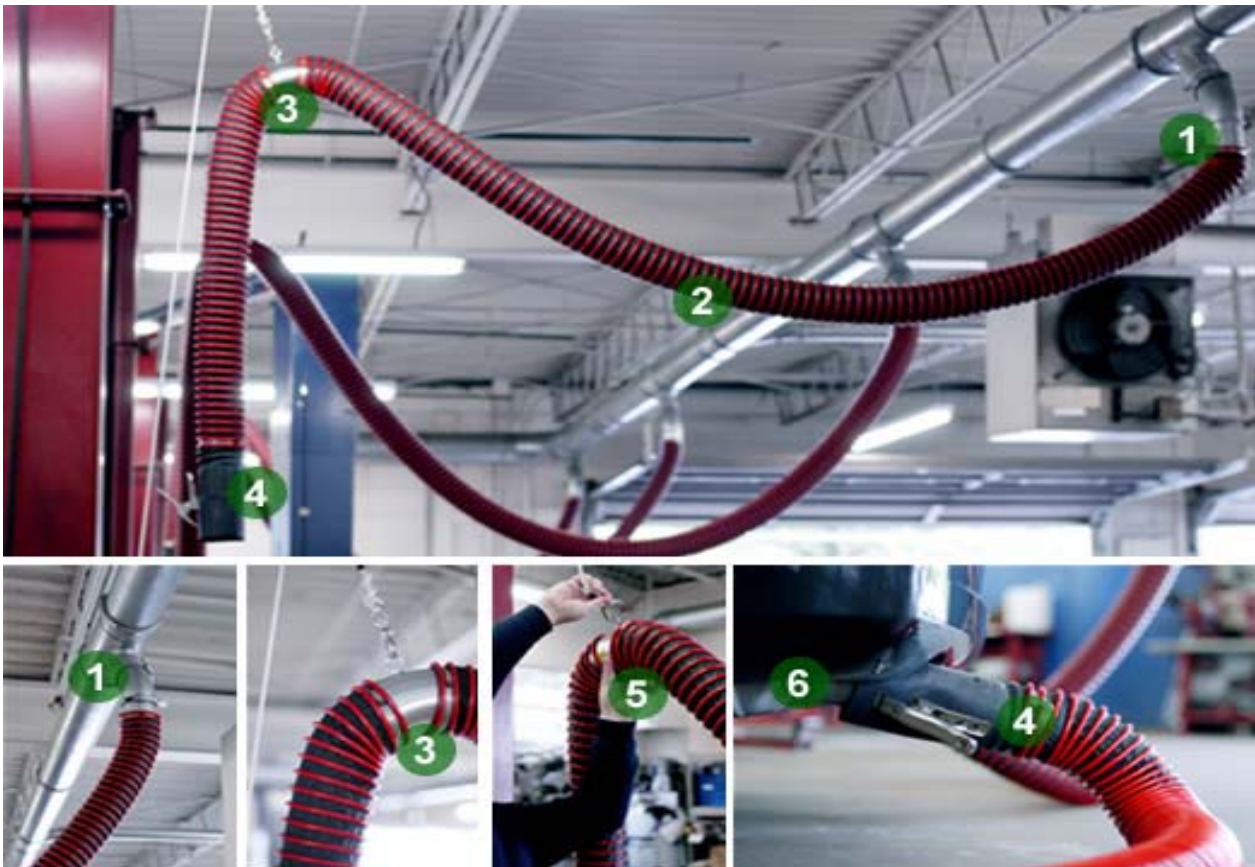

### Simple Drop Explained

1. Connects directly to the ducting system.
2. Hose is designed with the exact temperature and length needed for your custom application.
3. Hose is stowed using an elbow joint which suspends the hose.
4. A nozzle is selected which meets the needs of your custom application.
5. The hose is lowered from the ceiling and easily unclipped for use.
6. The nozzle easily attaches to the exhaust source.

**FUME-A-VENT™**  
**EXHAUST REMOVAL SYSTEMS**  
A Product of Air Cleaning Specialists, Inc.

AIR CLEANING SPECIALISTS, INC.  
826 Horan Drive Fenton, MO 63026  
866 455-2132 Fax 636 349-0556  
www.fume-a-vent.com info@fume-a-vent.com

This sheet has been copyrighted  
and is the property of  
Air Cleaning Specialists, Inc.

# Fume-A-Vent Type 4CW Neoprene Coated Polyester 400°F Hose

Date 4/13

Part No. H-04CW-XXXX

Type 4CW General Purpose 400°F Hose

TAB 1-D-3

The Fume-A-Vent Type **4CW Black Neoprene Fabric Hose with Non-marking Thermoplastic Helix Cover** is ideal for general purpose use and is a very economical with high efficiency air flow. It is ideal for use with cold or hot air transportation, engine or vehicle construction, exhaust and extraction applications as well. The hose has exceeded 300°F during certified testing and is rated to 400°F for intermittent use.

Temperature Range: - 30°F to +300°F (Baking Test)

This product meets UL 94, V-O requirements for flame resistance.

The intermittent temperature rating is up to 400°F use, when a Fan is properly utilized.

This hose features Neoprene-Coated Polyester Fabric with a galvanized steel helix for support. It is highly flexible and has a high compressibility ratio. It is vibration proof and flame resistant ideal for a variety of applications.

Other information including static pressure limits and helix pitch are available upon request. In most cases, a Fan and a Tailpipe Adaptor will be required. Common lengths shown below include 15' to 30' with 4" to 8" Diameters. Other size options up to 20" are always available upon request



Part No	Description	Weight Lbs.
H-04C-0415	4" x 15' Type 4CW 400° Neoprene Coated Polyester Hose with Black Rubber Clip Cover	12.15
H-04C-0420	4" x 20' Type 4CW 400° Neoprene Coated Polyester Hose with Black Rubber Clip Cover	16.2
H-04C-0425	4" x 25' Type 4CW 400° Neoprene Coated Polyester Hose with Black Rubber Clip Cover	20.25
H-04C-0430	4" x 30' Type 4CW 400° Neoprene Coated Polyester Hose with Black Rubber Clip Cover	24.3
H-04C-0515	5" x 15' Type 4CW 400° Neoprene Coated Polyester Hose with Black Rubber Clip Cover	13.05
H-04C-0520	5" x 20' Type 4CW 400° Neoprene Coated Polyester Hose with Black Rubber Clip Cover	17.4
H-04C-0525	5" x 25' Type 4CW 400° Neoprene Coated Polyester Hose with Black Rubber Clip Cover	21.75
H-04C-0530	5" x 30' Type 4CW 400° Neoprene Coated Polyester Hose with Black Rubber Clip Cover	26.1
H-04C-0615	6" x 15' Type 4CW 400° Neoprene Coated Polyester Hose with Black Rubber Clip Cover	14.4
H-04C-0620	6" x 20' Type 4CW 400° Neoprene Coated Polyester Hose with Black Rubber Clip Cover	19.2
H-04C-0625	6" x 25' Type 4CW 400° Neoprene Coated Polyester Hose with Black Rubber Clip Cover	24
H-04C-0630	6" x 30' Type 4CW 400° Neoprene Coated Polyester Hose with Black Rubber Clip Cover	28.8
H-04C-0815	8" x 15' Type 4CW 400° Neoprene Coated Polyester Hose with Black Rubber Clip Cover	19.95
H-04C-0820	8" x 20' Type 4CW 400° Neoprene Coated Polyester Hose with Black Rubber Clip Cover	26.6
H-04C-0825	8" x 25' Type 4CW 400° Neoprene Coated Polyester Hose with Black Rubber Clip Cover	33.25
H-04C-0830	8" x 30' Type 4CW 400° Neoprene Coated Polyester Hose with Black Rubber Clip Cover	39.9