
Fume-A-Vent Simple Drop System with Rope & Pulley Lifting System



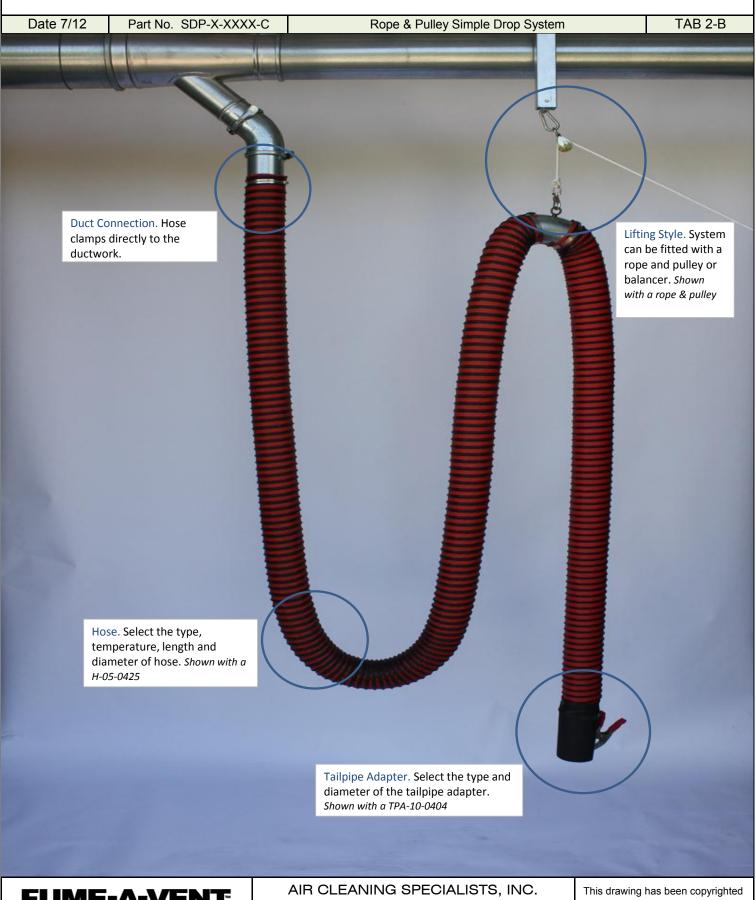

11088 Gravois Industrial Court, St. Louis, MO 63128 866 455-2132 Fax 636 349-0556


www.fumeavent.com info@fumeavent.com

This drawing has been copyrighted and is the property of Air Cleaning Specialists, Inc.

Fume A-Vent Conventional Overhead (Simple Drop) Systems

Date 7/12 Part No.SD-XXX Simple Drop Systems TAB 2-A

Fume-A-Vent's Overhead Systems are the user-friendly and cost-effective solution that meets a wide variety of demands. These systems incorporate many hose types and lifting configurations. The hose types range from high-temperature silicone to medium-temperatures polyester. The lifting configurations include ropes and pulleys and cable balancers. Complete the package by adding a direct-mount fan, which allows a complete stand-alone system, or connect to ductwork and a central fan.

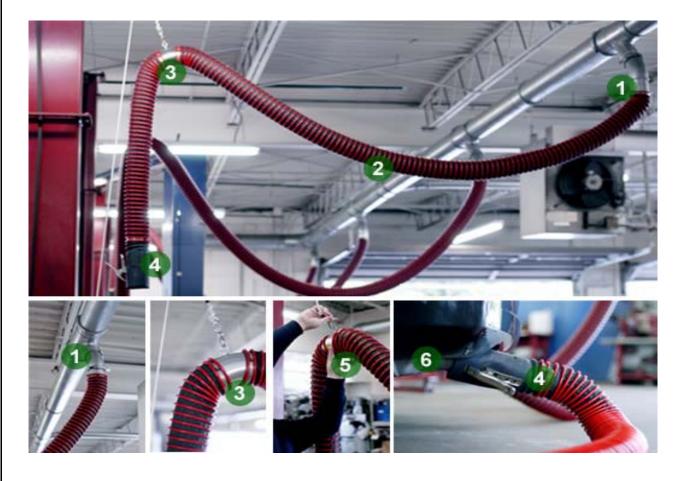

Simple Drop Explained

- 1. Connects directly to the ducting system.
- 2. Hose is designed with the exact temperature and length needed for your custom application.
- 3. Hose is stowed using an elbow joint which suspends the hose.
- 4. A nozzle is selected which meets the needs of your custom application.
- 5. The hose is lowered from the ceiling and easily unclipped for use.
- 6. The nozzle easily attaches to the exhaust source.



Fume-A-Vent Type 5C 500°F Single-Ply Silicone Coated Fireberglass Hose

Date 4/13 Part No. H-05C-XXXX Type 5C 500°F Hose TAB 1-E-2

Fume-A-Vent Type 5C Hose is specially designed with Exhaust Removal in mind. It can be used on hose reels, Simple Drop Systems, and medium to light duty car exhaust removal. Its coated materials have some of the best outside wear resistance.

Temperature Range: -50°F to +550°F

This product passed UL-94,V-O standards for flame resistance.

This product has an overall oven baking temperature of 550°F. When used with a Exhaust Fan, higher temperatures can be seen.

This hose is made with a Flame Resistant Single-Ply Silicone Coated Fiberglass Hose. The exterior helix deign makes great flow characteristics. The hose is made of a gray fabric with a galvanized steel helix. It has a high compressability rate and flexibility.

Other information including wall thickness and helix pitch are available upon request. Common lengths shown below include 15' to 35' with 3" to 8" Diameters. Other size options are always available upon request.



Part No	Description	Wt. Lbs.
H-05C-0320	3" x 20' Type 5C 500° Single-Ply Silicone Coated Fiberglass Hose	12.40
H-05C-0415	4" x 15' Type 5C 500° Single-Ply Silicone Coated Fiberglass Hose	11.70
H-05C-0420	4" x 20' Type 5C 500° Single-Ply Silicone Coated Fiberglass Hose	15.60
H-05C-0425	4" x 25' Type 5C 500° Single-Ply Silicone Coated Fiberglass Hose	19.50
H-05C-0430	4" x 30' Type 5C 500° Single-Ply Silicone Coated Fiberglass Hose	23.40
H-05C-0435	4" x 35' Type 5C 500° Single-Ply Silicone Coated Fiberglass Hose	27.30
H-05C-0520	5" x 20' Type 5C 500° Single-Ply Silicone Coated Fiberglass Hose	15.40
H-05C-0530	5" x 30' Type 5C 500° Single-Ply Silicone Coated Fiberglass Hose	23.10
H-05C-0615	6" x 15' Type 5C 500° Single-Ply Silicone Coated Fiberglass Hose	10.50
H-05C-0620	6" x 20' Type 5C 500° Single-Ply Silicone Coated Fiberglass Hose	14.00
H-05C-0630	6" x 30' Type 5C 500° Single-Ply Silicone Coated Fiberglass Hose	21.00
H-05C-0815	8" x 15' Type 5C 500° Single-Ply Silicone Coated Fiberglass Hose	18.45
H-05C-0820	8" x 20' Type 5C 500° Single-Ply Silicone Coated Fiberglass Hose	24.60
H-05C-0825	8" x 25' Type 5C 500° Single-Ply Silicone Coated Fiberglass Hose	30.75
H-05C-0830	8" x 30' Type 5C 500° Single-Ply Silicone Coated Fiberglass Hose	36.90



AIR CLEANING SPECIALISTS, INC.

11088 Gravois Industrial Court, St. Louis, MO 63128 866 455-2132 Fax 636 349-0556 www.fumeavent.com info@fumeavent.com This drawing has been copyrighted and is the property of Air Cleaning Specialists, Inc.