
Fume A-Vent Conventional Overhead (Simple Drop) Systems

Date 7/12 | Part No.SD-XXX | Simple Drop Systems TAB 2-A

Fume-A-Vent's Overhead Systems are the user-friendly and cost-effective solution that meets a wide variety of demands. These systems incorporate many hose types and lifting configurations. The hose types range from high-temperature silicone to medium-temperatures polyester. The lifting configurations include ropes and pulleys and cable balancers. Complete the package by adding a direct-mount fan, which allows a complete stand-alone system, or connect to ductwork and a central fan.

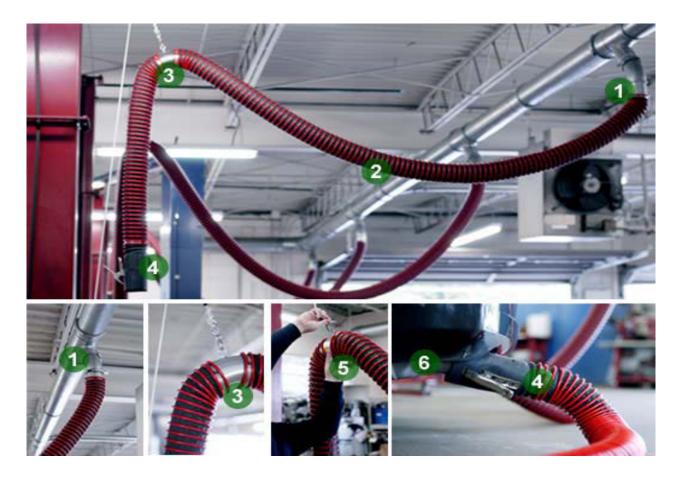


Simple Drop Explained

- 1. Connects directly to the ducting system.
- 2. Hose is designed with the exact temperature and length needed for your custom application.
- 3. Hose is stowed using an elbow joint which suspends the hose.
- 4. A nozzle is selected which meets the needs of your custom application.
- 5. The hose is lowered from the ceiling and easily unclipped for use.
- 6. The nozzle easily attaches to the exhaust source.



Fume-A-Vent Simple Drop System with Rope & Pulley Lifting System

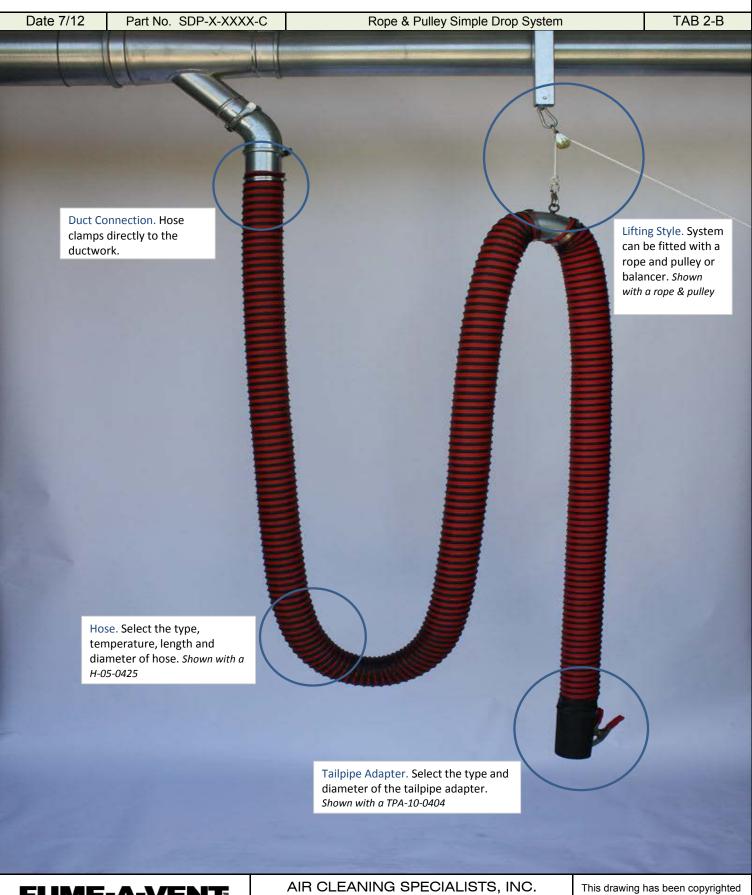



11088 Gravois Industrial Ct. St. Louis MO 63128 866 455-2132 Fax 636 349-0556

www.fumeavent.com info@fumeavent.com

and is the property of Air Cleaning Specialists, Inc.

Fume-A-Vent Type 6A 600°F High Temperature Film Hose

Date 7/12 Part No. H-06A-XXXX Type 6A 600°F Hose TAB 1-F-2

The Fume-A-Vent Type 6A hose is made for high stress exhaust applications from spark ignition, or diesel motors. It can also be utilized in construction machines, hose reels, and other similar exhaust systems.

Temperature Range: - 80°F to +570°F (Baking Test)

This product meets high temperature requirements.

This product has a temperature rating at 660°F for intermittent use, 570°F constant use.

This hose is made with a black high temperature film and a galvanized steel helix, covered in rubber to prevent abrasion. It has great flexibility and compression, and its film makes it super lightweight. High tensile strength and a high resistance to mechanical loading are also seen.

Other information including wall thickness and helix pitch are available upon request. In some cases, a Fan and a Tailpipe Adaptor will be required. Common lengths shown below include 15' to 30' with 4" to 8" Diameters. Other size options are always available.



Part No	Description	Wt. Lbs.
H-06A-0415	Fume-A-Vent 4" x 15' Type 6A 600°F High Temperature Film Hose	12.5
H-06A-0420	Fume-A-Vent 4" x 20' Type 6A 600 High Temperature Film Hose	16.2
H-06A-0425	Fume-A-Vent 4" x 25' Type 6A 600°F High Temperature Film Hose	20.25
H-06A-0430	Fume-A-Vent 4" x 30' Type 6A 600°F High Temperature Film Hose	24.3
H-06A-0515	Fume-A-Vent 5" x 15' Type 6A 600°F High Temperature Film Hose	13.5
H-06A-0520	Fume-A-Vent 5" x 20' Type 6A 600°F High Temperature Film Hose	18.0
H-06A-0525	Fume-A-Vent 5" x 25' Type 6A 600°F High Temperature Film Hose	22.5
H-06A-0530	Fume-A-Vent 5" x 30' Type 6A 600°F High Temperature Film Hose	27.0
H-06A-0615	Fume-A-Vent 6" x 15' Type 6A 600°F High Temperature Film Hose	15.7
H-06A-0620	Fume-A-Vent 6" x 20' Type 6A 600°F High Temperature Film Hose	20.9
H-06A-0625	Fume-A-Vent 6" x 25' Type 6A 600°F High Temperature Film Hose	26.1
H-06A-0630	Fume-A-Vent 6" x 30' Type 6A 600°F High Temperature Film Hose	31.3
H-06A-0815	Fume-A-Vent 8" x 15' Type 6A 600°F High Temperature Film Hose	19.6
H-06A-0820	Fume-A-Vent 8" x 20' Type 6A 600°F High Temperature Film Hose	26.1
H-06A-0825	Fume-A-Vent 8" x 25' Type 6A 600°F High Temperature Film Hose	32.6
H-06A-0830	Fume-A-Vent 8" x 30' Type 6A 600°F High Temperature Film Hose	39.2



AIR CLEANING SPECIALISTS, INC.

11088 Gravois Industrial Ct. St. Louis MO 63128 866 455-2132 Fax 636 349-0556 www.fumeavent.com info@fumeavent.com This drawing has been copyrighted and is the property of Air Cleaning Specialists, Inc.